QuickRange

Your rod set is manufactured by a British company committed to quality.

Every tool we produce undergoes rigorous testing throughout its manufacturing process so you can have complete confidence in your purchase.

To get the best results from your rod set please follow these guidelines, they will save you time and money well into the future.

If joined rods are bent beyond the following recommended rates of bend, the rod and/or brass fitting may be damaged as a result of bending.

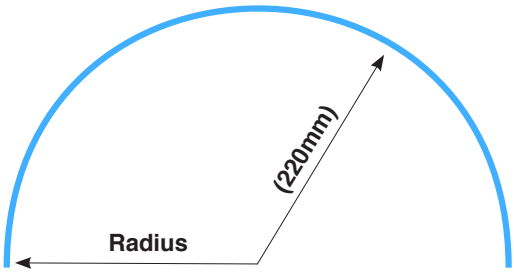

SHORT RODS

Shorter rods will flex to the same bend radius as above but greater care must be taken because of the increased stiffness caused by metal end fittings.

TIPS AND TRICKS

When drilling a hole through to a restricted cavity, angle the hole in the direction you want the rods to go. It will reduce the bending load and minimise the chance of the rod end catching.





Always rotate connected rods clockwise to avoid them unscrewing in use.

Use the most appropriate cable handling accessory. See website for available ranges. A flexi lead should be employed to help ease rods round corners. The way in which you use your rods is limited only by your imagination!

Fibreglass is a mild irritant to those with sensitive skin. Wearing gloves is recommended when using the rods. If you have a reaction (redness or mild itching) wash your hands thoroughly. If the reaction persists for longer than 48 hours consult a doctor.

All Rod measurements are nominal. We reserve the right to change the design and specification to improve quality and enhance performance.

To maintain the integrity and flexibility of this product it is essential to keep the threaded parts fully mated. Failure to do so may cause the threads to snap and invalidate the warranty.

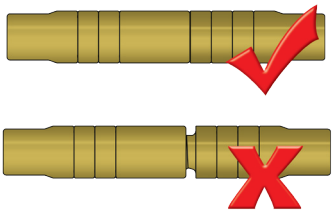

Keep threads free of dust and debris.

Regularly clean them with a stiff brush.

Do not lubricate the threads as this will attract debris and/or allow rods to easily unscrew. A thread cleaner is available for some product ranges.

If the rods get caught on an obstuction do not force them. Gently ease the rods back and forth. If the rods meet an obstruction e.g. a joist, try 'flicking' them to make the end 'jump' over.

Cleanly cut off damaged part of rod. If necessary carefully drill/ ream out any fibreglass and/or residual glue from the metal end. Glue the metal end onto the rod with a good quality super glue.

BuildQuick

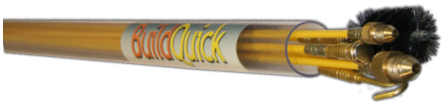

General purpose kit for cable & piping!

CONTENTS:

6 x 4mm x 1 metre GRP rods
1 x Mini Eye
1 x Mini Hook
1 x Flexi Lead (130mm x 4mm)
1 x Magnet
1 x 10mm Pipe Grip
1 x 15mm Pipe Grip
1 x Black Nylon Brush

CableQuick

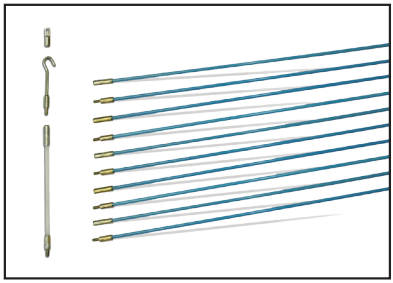

Dedicated kit for installing cable!

CONTENTS:

10 x 4mm x 1 metre GRP rods
1 x Mini Eye
1 x Mini Hook
1 x Flexi Lead (130mm x 4mm)

PlumbQuick

Specialist kit for installing plastic piping!

CONTENTS:

6 x 4mm x 1 metre GRP rods
1 x Mini Eye
1 x 10mm Pipe Grip
1 x 15mm Pipe Grip
1 x Flexi Lead (130mm x 4mm)